


Technical sheet :

TJ 65+



Capacities		Imperial
Working height	h21	72 ft 2 in
Platform height	h7	64 ft 9 in
Max. outreach	r1	58 ft 4 in
Pendular arm rotation (bottom)		±63 °
Platform capacity	Q	899 lbs
Turret rotation		360 °
Platform rotation (right / left)		90 ° / 90 °
Number of people (inside / outside)		3 / 3
Weight and dimensions		
Platform weight*		29983 lbs
Platform dimensions (length x width)	lp / ep	7 ft 7 in x 2 ft 11 in
Overall width	b1	8 ft 2 in
Overall length	l1	33 ft
Overall height	h17	8 ft 9 in
Overall length (stowed)	l9	24 ft 1 in
Overall height (stowed)	h18	9 ft 11 in
Floor height (access)	h20	1 ft 3 in
Jib length	l13	6 ft 7 in
Counterweight offset (turret at 90°)	a7	4 ft 5 in
Internal turning radius (over tyres)	b13	6 ft 7 in
External turning radius	Wa3	14 ft 5 in
Ground clearance at centre of wheelbase	m2	1 ft 5 in
Wheelbase	y	9 ft 2 in
Performances		
Drive speed - stowed		3 mph
Drive speed - raised		0.6 mph
Gradeability		40 %
Wheels		
Tyres type		Solid Tyres Cured-On
Drive wheels (front / rear)		2 / 2
Steering wheels (front / rear)		2 / 2
Braking wheels (front / rear)		2 / 2
Engine/Battery		
Engine brand / model		Kubota - D1803-CR-TIE4B
I.C. Engine power rating / Power (kW)		49.6 Hp / 37 kW
Miscellaneous		
Ground Pressure		265.42 PSI
Hydraulic Pressure		28 PSI
Hydraulic tank capacity		24.83 US gal
Fuel tank		19.02 US gal
Vibration on hands/arms		< 0 ft/s
Standards compliance		
This machine is in compliance with:		ANSI A92.20-2018 CSA B354.6 ICES-002-Issue 6 Standard Canadian EMC

Dimensional drawing

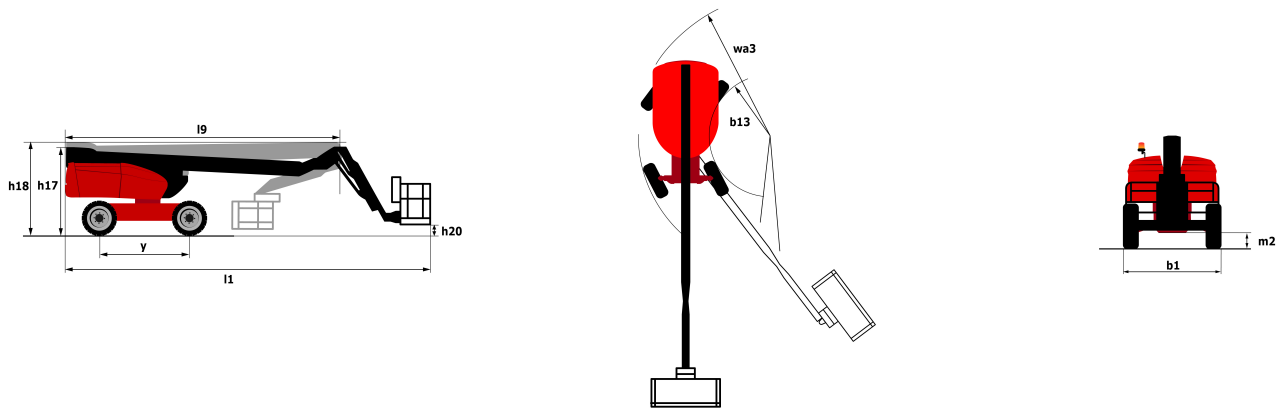

Equipment

Standard

- 230V Predisposition
- 4 simultaneous movements
- 4 wheel drive
- 4 wheel steer with crab mode
- Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
- Backup electrical pump
- Basket 2,300 mm
- Continuous turret rotation
- Differential locking on rear axle
- Drive enable
- Electronic platform compensation
- Emergency stop button in platform and on frame
- Engine on swivel chair
- Flashing Light
- Front axle with limited slip
- Fuel gauge with low level indicator
- Integrated diagnostic assistance
- Management via engine speed bearing
- Oscillating front axle
- Protective cover for control panel
- Remote control for transport

Optional

- 110 V plug with differential circuit breaker
- Air predisposition
- Beep on every movement
- Beep upon travel
- Biodegradable oil
- Coded anti-start
- Cold weather kit
- Non-marking tyres
- Onboard generator (5 kW)
- Panel support kit
- SMS : Safe Man System
- Screen protection on the lower box control
- Turret cover with key lock
- Water predisposition

Optional

Welder ready package

Working light



Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes